




The Glide sliding door operator provides exceptional performance in all scenarios. It offers a wide range of innovative options to meet the needs of all environments, with its modular design and mechanical features that create a flexible, functional, slimline, sliding door system. The Glide comes with the Digidor logic selector and is also programmable with a smart phone over Bluetooth.

Powered by a German Dunker motor with a monitored battery back-up and tested to 1,000,000 cycles, the Glide really does present a practical, attractive solution for your entrance.

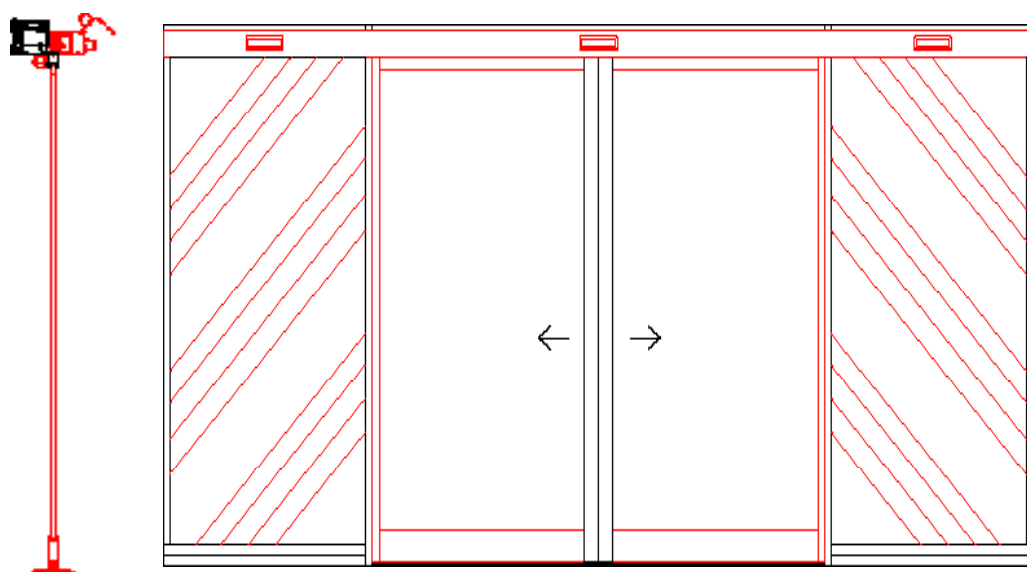

BODY FINISH

RAL Colour Polyester
Powder Coated to suit

DIMENSIONS

Height: 115mm
Length: up to 6800mm
Depth: 180mm

NUMBER OF DOOR LEAVES

1 Leaf / 2 Leaves

LEAF DIMENSIONS

1 Leaf: 3400mm
2 Leaves: 1700mm each

MAX PAYLOAD

1 Leaf: 140 KGS
2 Leaves: 100 KGS

WEIGHT

11 KGS for the first metre
5 KGS thereafter

POWER SUPPLY

13 AMP switched
fused spur

POWER USAGE

150 Watts

ELECTRIC LOCK

Optional

OPTIONS

FEATURES



GLIDE 1

Single sliding door opening to the left or right.

- Activation sensors
- Touch pads
- Digidor logic selector
- Winter setting (reduced opening)
- Electric lock as an option
- Can work with non-thermally broken, thermally broken sections, all glass or slimline units
- Battery back up as standard



GLIDE 2

Double sliding door opening from the centre.