




The revolving door was created over one hundred years ago to keep the cold out and warmth in. Over the years these doors have become not only a practical solution but also an aesthetically welcoming feature to many buildings.

The Orbit revolving door can be manufactured with polyester powder coated, anodised or stainless-steel finishes. It is designed to fit effortlessly into all manner of facades and will provide you with insulation whilst having a smooth traffic flow.

Glazing to the drum walls and the door wings is 8mm clear laminated glass as standard.

If required, 10mm clear laminated glass in the door wings is an option.

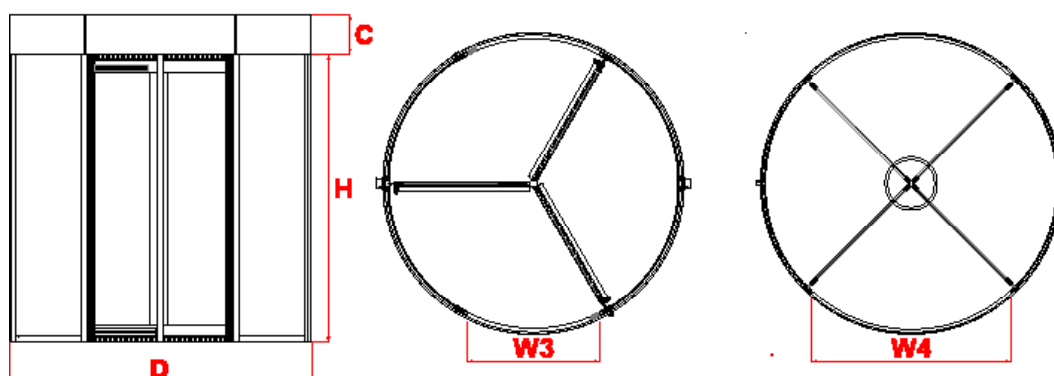

D	H	C	W/3	W/4
2000mm	2100mm-3100mm	100mm-1000mm	920mm	1860mm
2200mm	2100mm-3100mm	100mm-1000mm	1010mm	2060mm
2400mm	2100mm-3100mm	100mm-1000mm	1105mm	2260mm
2600mm	2100mm-3100mm	100mm-1000mm	1195mm	2460mm
2800mm	2100mm-3100mm	100mm-1000mm	1285mm	2660mm
3000mm	2100mm-3100mm	100mm-1000mm	1375mm	2860mm
3200mm	2100mm-3100mm	100mm-1000mm	1465mm	3060mm
3400mm	2100mm-3100mm	100mm-1000mm	1555mm	3460mm
3600mm	2100mm-3100mm	100mm-1000mm	1645mm	3660mm
Special Dimensions Available on Request				

FRAME FINISH

RAL Colour Polyester Powder Coated to suit

Natural or coloured anodised

Satin or Polished Stainless Steel

DIMENSIONS

Diameter: 2000mm - 3600mm

Height: 2100mm - 3000mm

NUMBER OF DOOR LEAVES

3 / 4 Wing

HANDLES

Full height Satin Stainless Steel

OPERATION

Manual / Power Assist / Automatic

FLOOR RING

Satin Stainless Steel

OPTIONAL ITEMS

Night Sliding Curved Doors

Collapsible Door Set

Floor Matting