




A versatile operator for all your requirements. The Proswing is as comfortable on internal doors (where silence and ease of use are most important) as it is on a large external door (where durability is key). The Proswing range has been developed by Prosale to ensure a robust and reliable operator, that has the aesthetics that wouldn't look out of place internally. Able to work as a pair in tandem or coping with rebated doors isn't a problem with the extensive programming available. The Proswing range has everything covered.

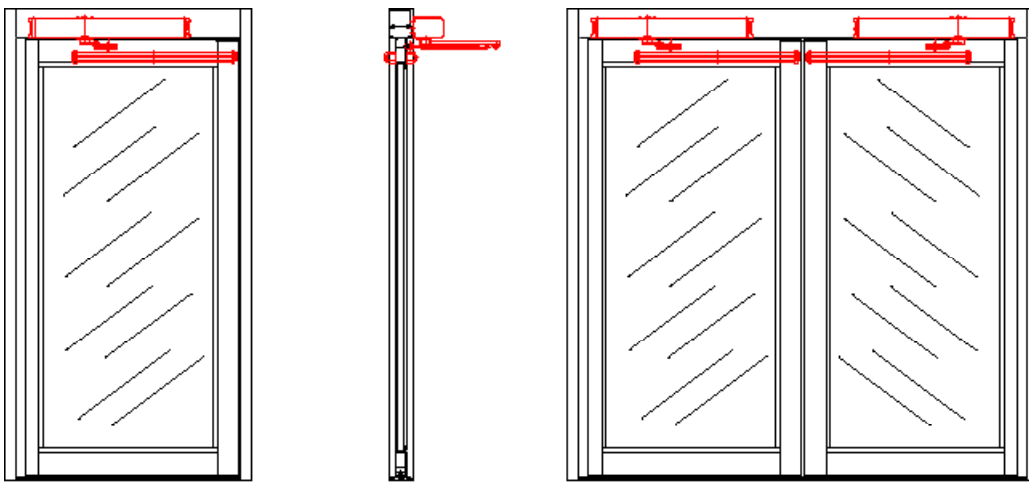

BODY FINISH

Satin Anodised Aluminium
black end caps

DIMENSIONS

Height: 86mm
Length: 664mm
Depth: 130mm

NUMBER OF DOOR LEAVES

1 Leaf / 2 Leaves

OPENING DIRECTION

In or Out

LEAF DIMENSIONS

700mm – 1400mm

MAX PAYLOAD

300 KGS

WEIGHT

12 KGS

POWER SUPPLY

13 AMP switched
fused spur

POWER USAGE

85 Watts

OPENING ANGLE

Up to 110 degrees

ELECTRIC LOCK POWER OUTPUT

12V or 24V

SPRING TENSION

EN4 – EN6

OPTIONS

FEATURES



PROSWING SB

Has the same functions as the Proswing S, but includes a battery back up, this does increase the width of the operator by 150mm.



PROSWING F

We have adapted the Proswing S operator to have a fire certificate rating of 30/30 and tested in the UK.



PROSWING M

The Proswing M is ideal for when you want the door to remain open in a power failure, as the operator is motor open, motor close (no spring).

- Heavy Duty
- Low Energy/Push & Go mode
- Reduced speed and acceleration for users with limited and slow reaction capabilities, according to specific regulations and directives
- Optional opening with remote control
- Compatible with different opening, safety and security devices
- Head fitted switch, ON/OFF
- Head fitted 3 position logic switch
- Easy and intuitive parameter adjustment with double display on control board
- Works with different models of electric lock/ magnet
- PPC covers or continuous cover for pair available